



75X51-S-II-2.0




AUSTROFLAMM



www.austroflamm.com

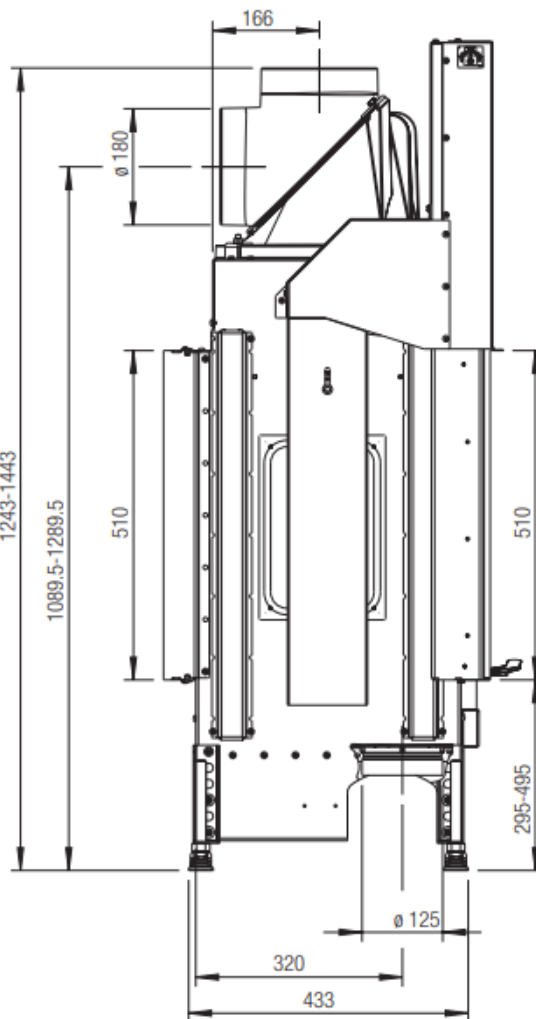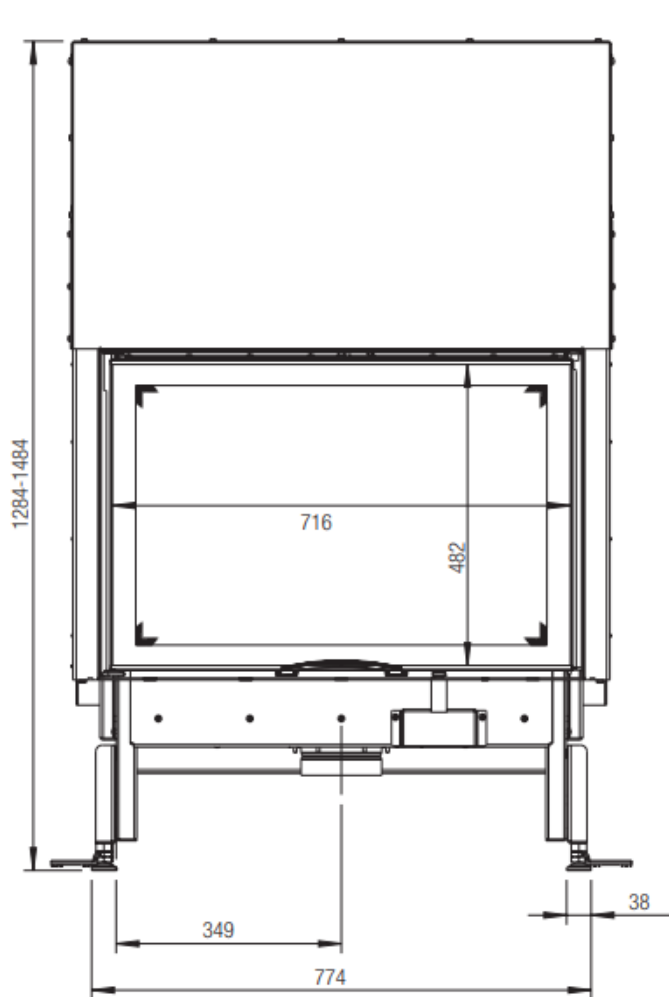

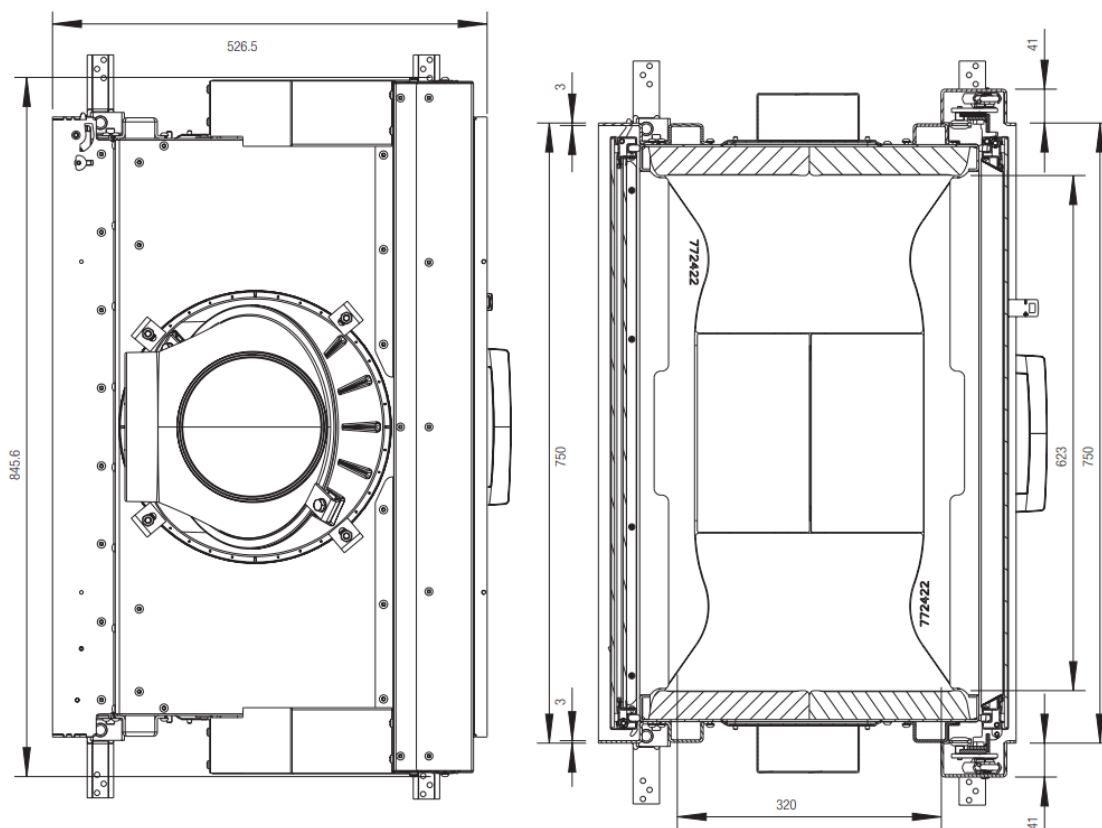

DIMENSIONS AND WEIGHTS

| | |
|---|-----------|
| Height [mm] | 1284-1484 |
| Width [mm] | 848 |
| Depth [mm] | 527 |
| Weight [kg] | 202 |
| Width (body installation dimension) [mm] | 750 |
| Door frame, height [mm] | 510 |
| Flue pipe outlet, diameter [mm] | 180 |
| Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS) | 0 |
| Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS) | 100/- |
| Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS) | 150 |
| Ceramic flues - max. length [m] | 4 |

HEAT OUTPUT

| | |
|---|----------|
| Nominal heat efficiency [kW] lt. EN test EN 13229 | 12 |
| Heat output, minimum [kW] / Maximum heat output [kW] | 6-17 |
| Energy efficiency category | A+ |
| Circulating air cross-section without / with metal secondary heating surface [cm ²] | 700/1300 |

FEATURES

| | |
|--------------|-----|
| Double pane | yes |
| Sliding door | yes |

DATA FOR THE CHIMNEY SWEEP

| | |
|---|-------|
| Total flue gas flow [g/s] | 13.07 |
| Flue gas temperature [°C] | 252 |
| Minimum feed pressure at nominal heat efficiency [Pa] | 13 |