

SPECIFICATIONS

Rated thermal input	6 kW
Efficiency	82 %
Smoke flue diameter	150 mm
Min. thrust (under pressure) for rated thermal input	12 Pa
Fuel gas temperature	262 °C
Volume of fuel gas	4,6 g/s
CO emissions in fuel gas (at 13 % O ₂)	0,0873 %
Dust in the fuel gas (at 13 % O ₂)	19 mg/Nm ³
Volume of fuel per hour	1,85 kg/h
Fuel	wood (beech logs)
Weight	138 kg



LIST OF SPARE PARTS


Glass

2x

530 x 330 x 468 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Back
4. Side
5. Deflector
6. Carcon blind

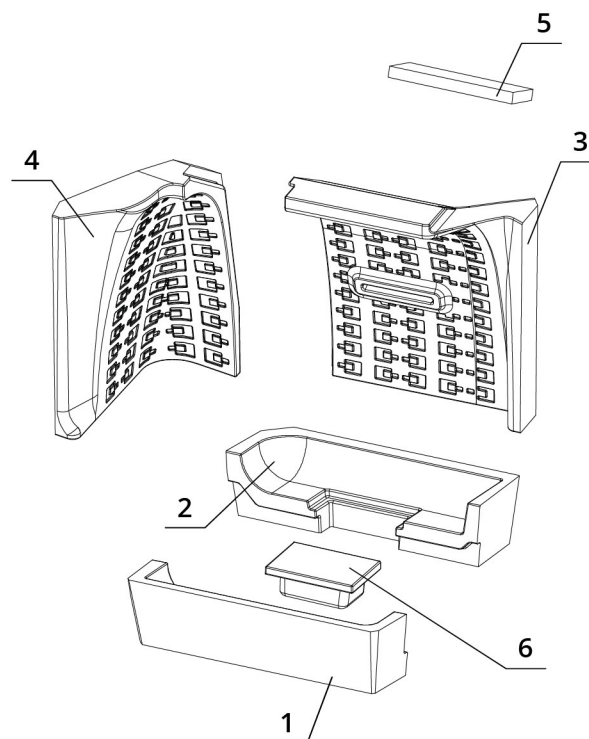

BEF THERM 6 CP PASSIVE

BLOWER DOOR
TEST

BImSchV
Stufe 2


15a
B - VG

ČSN EN
13229

eco
design

www.befhome.com

TECHNICAL DRAWING

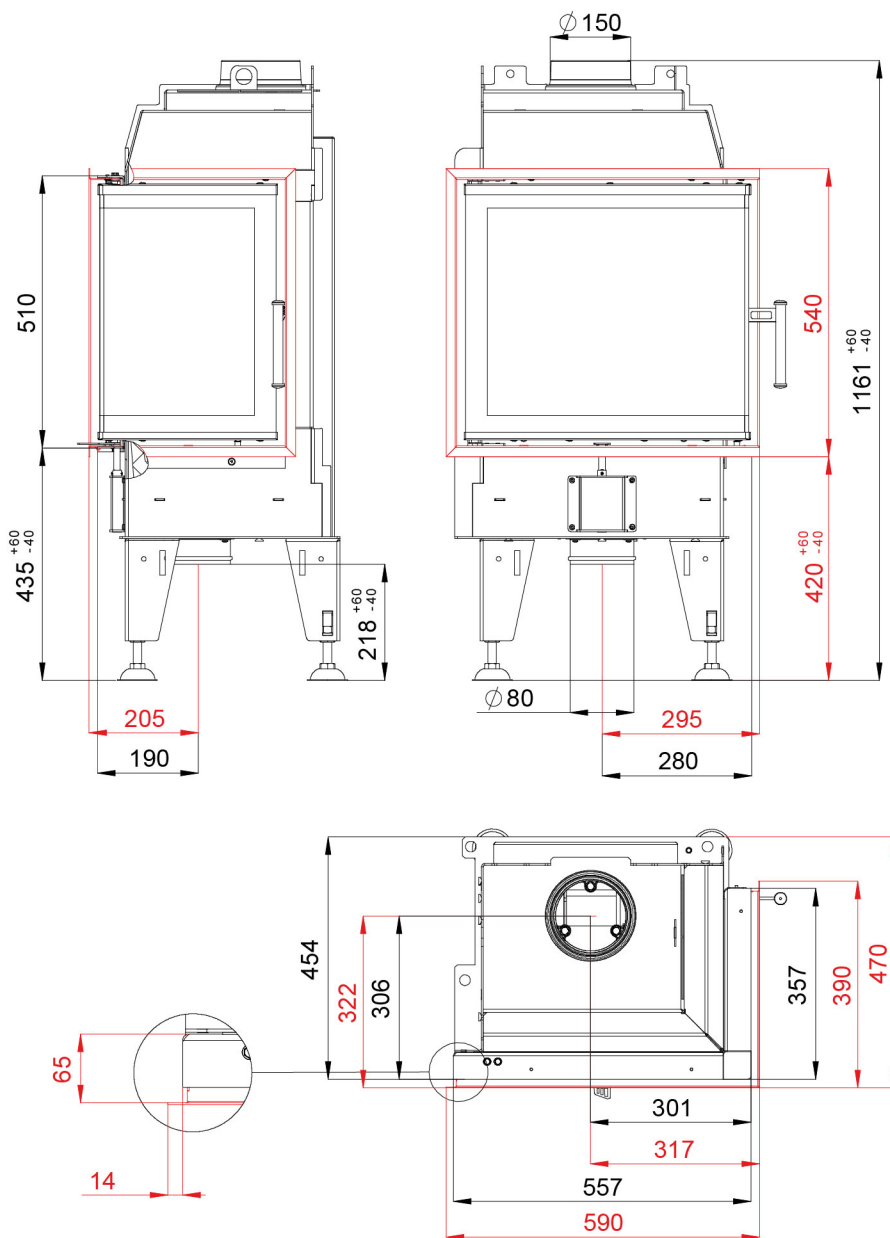

BEF THERM 6 CP PASSIVE

BLOWER DOOR TEST	BlmSchV Stufe 2	15a B - VG	ČSN EN 13229	
-----------------------------	---------------------------	----------------------	------------------------	---